


A-O MODULATOR (MODEL ATM SERIES)

- Intensity Modulation
- Fast Modulation Capability
- Optical Frequency Shifting
- Beam Deflection
- Low Drive Power
- High Reliability

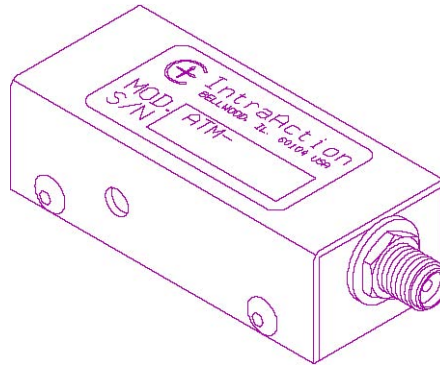

SPECIFICATION	
Optical Wavelength Range ¹	440 to 700 nm
Acousto-optic Material	Tellurium Dioxide (TeO ₂)
Sound Velocity	4260 m/sec (longitudinal)
Input Impedance	50 ohms
Input VSWR	<1.3:1 at center frequency
Static Optical Insertion Loss	4 percent
Size (less SMA connector)	2.00 D X 0.63 H X 0.9 W inches 5.08 D X 1.60 H X 2.28 W cm

Model	ATM-80A1	ATM-125B1	ATM-200C1
Center Frequency	80 MHz	125 MHz	200 MHz
Active Aperture Height	1 mm	0.6 mm	0.3 mm
Beam Separation (633 nm)	11.9 mrad	18.6 mrad	29.7 mrad
Diffraction Efficiency	85 percent	80 percent	70 percent
RF Drive Power ² (633 nm)	700 milliwatts	800 milliwatts	900 milliwatts
(514 nm)	500 milliwatts	550 milliwatts	600 milliwatts
Optical Rise Time (beam diameter)	31 nsec (0.2 mm)	20 nsec (0.13 mm)	9.2 nsec (0.06 mm)
	77 nsec (0.5 mm)	38 nsec (0.25 mm)	15.5 nsec (0.1 mm)
Modulation Frequency (-3 db)	15.8 MHz (0.2 mm)	24.5 MHz (0.13 mm)	50 MHz (0.06 mm) 30
	6.3 MHz (0.5 mm)	12.8 MHz (0.25 mm)	MHz (0.1 mm)

¹ Specifications vary with optical wavelength.

² Drive electronics Model ME-801/ME-1251/ME-2001 analog input, ME-801T/ME-1251T/ME-2001T digital input. OEM drivers also available.

